


# How To Make Miniature Clay Pot Bells

Great as Christmas gifts or a fun Handbell Camp craft project



## Parts Needed

1. Miniature Clay Pot  
(available in most hobby stores)
2. 2.5" Shaker Peg  
(also available in hobby stores)
3. 19mm Screw Eye
4. #10 Duolock Snap  
(available where fishing tackle is sold)
5. 3/16" Flat Washer
6. 3/16 size Swivel Sinker  
(available where fishing tackle is sold)

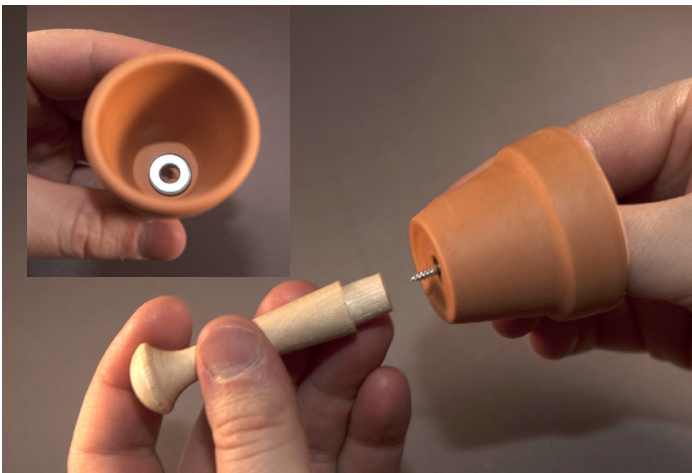

Place a flat washer into the bottom of the pot and, holding the screw eye in place, begin to thread the Shaker peg onto it. The washer will prevent the clay pot from cracking as you tighten the screw eye.



Once the threading is started, finish by securing the screw eye with a pair of needle-nose pliers. (Note: You may want to use the screw eye to put a starter hole in the peg before threading it through the bell.)



Open the Duolock Snap and attach the sinker to the small end. Leave the large end open. Thread the large end through the screw eye to complete the clapper. It is not necessary to close the hook.



Your Miniature Clay Pot Bell is done and ready to decorate. You can hide the recessed area of the Shaker peg with ribbon or saw it off prior to assembling the bell.